
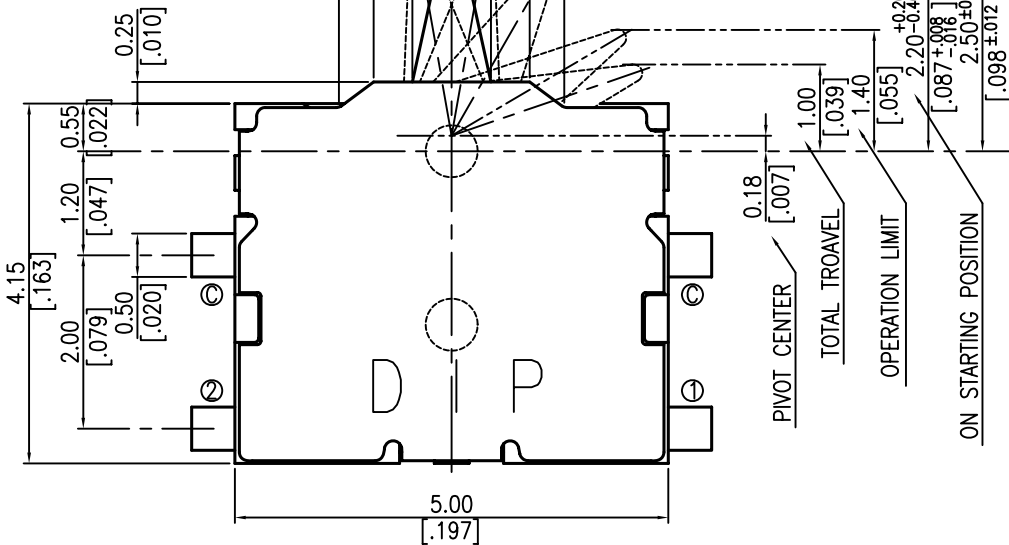


RELEASE POINT INCLINATION (13°)

(13.0°) (13.0°)





PIVOT CENTER
[.007]


TOTAL TROAVEL
[.039]

OPERATION LIMIT
[.055]

ON STARTING POSITION
[.087 ±.018]

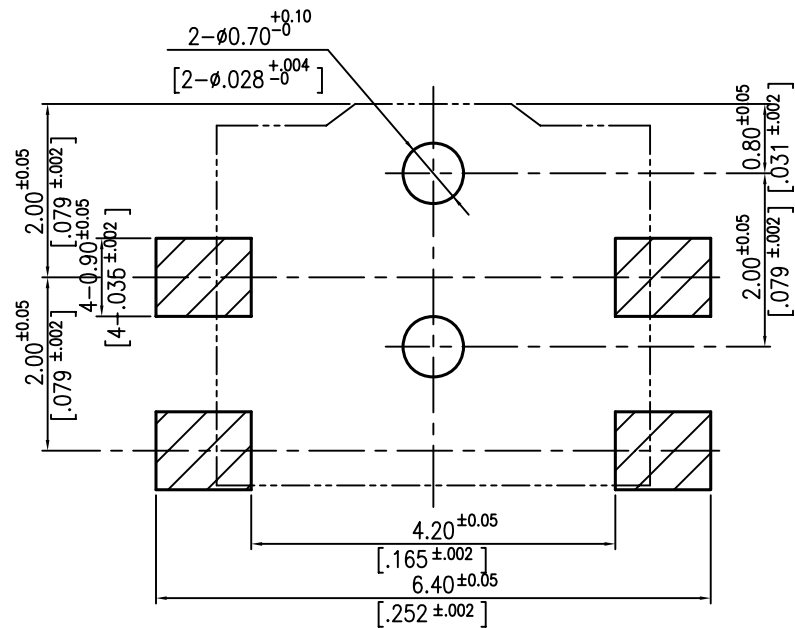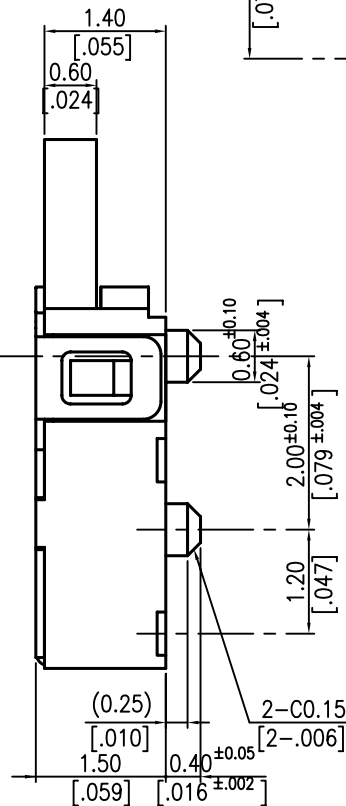

P.C.B. LAYOUT
(VIEW FROM THE DIRECTION A)



CIRCUIT

TERMINAL NO.		②	①
LEVER POSITION			
Ⓐ		■	
Ⓐ			■
Ⓑ		■	

SPECIFICATIONS:

- 1.Rating :10mA,DC 5V
- 2.Contact Resistance :500mΩ Max
- 3.Insulation Resistance :DC 100V 1M±5s 100 MΩ
- 4.Dielectric Strength :AC 100V 1M±5s
- 5.Operating Force(OF):30gf Max.
- 6.Life: 100,000 CYCLES
- 7.Operating Temperature Range:-10°~60°C
Storage Temperature Range:-20°~70°C

NOTE:

- 1.ALL DIMENSIONS ARE IN MILLIMETERS.
BRACKETED DIMENSIONS ARE IN INCHES.
- 2.GENERAL TOLERANCES ±0.2mm.

ZONE	REV.	DESCRIPTION	DATE	APPD.
△				
△				
△				
△	A	DWG. REL.	2009.09.01	

APPD:	Q' TY:		PART NAME:	
CHKD:	SCALE: 16/1		DETCTOR SWITCH	
DR:	REV: Wilson	PART NO: DTE-P-Q	DWG NO:	
DESIGN:	UNITS: mm		RD5PEP	