




Specifications

Featur: Non-shorting
 Function: OFF-ON (LOCK)
 Rating: 3A / 30 VDC
 Contact Resistance: 30 mΩ MAX
 Insulation Resistance: 500 MΩ min at 500 VDC
 Electronics Life: 6,000 cycles
 Mechanical Life: 30,000 cycles
 Operating Temperature Range : -5°C to +60°C.



Materials

Case: Glass filled nylon 6/6, Black.
 Plunger: Nylon, Black.
 Housing: Nylon, Black.
 Contact / Terminal: Copper, Silver plated.

Soldering Process

Manual Soldering: Use 30 watts soldering iron and controlled the temperature at 300 ± 5°C.
 Duration of solder immersion: Max. 3 sec.
 Wave Soldering: Recommend soldering temperature: 260 ± 5°C
 Duration of solder immersion: Max. 5 sec.
 (PCB thickness is 1.6 mm (.063 inch))



HOW TO ORDER

Note: Specifications and availability subject to change without notice.


Model No.	Type	CAP	CAP Color
HB	101		1 White 2 Black
		A Rectangle, Nylon	
		B Round, ABS	
		F Round, Nylon	

EXAMPLE:

HB-101 (Without Cap)

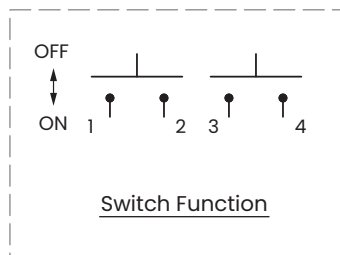


▼ DIMENSION

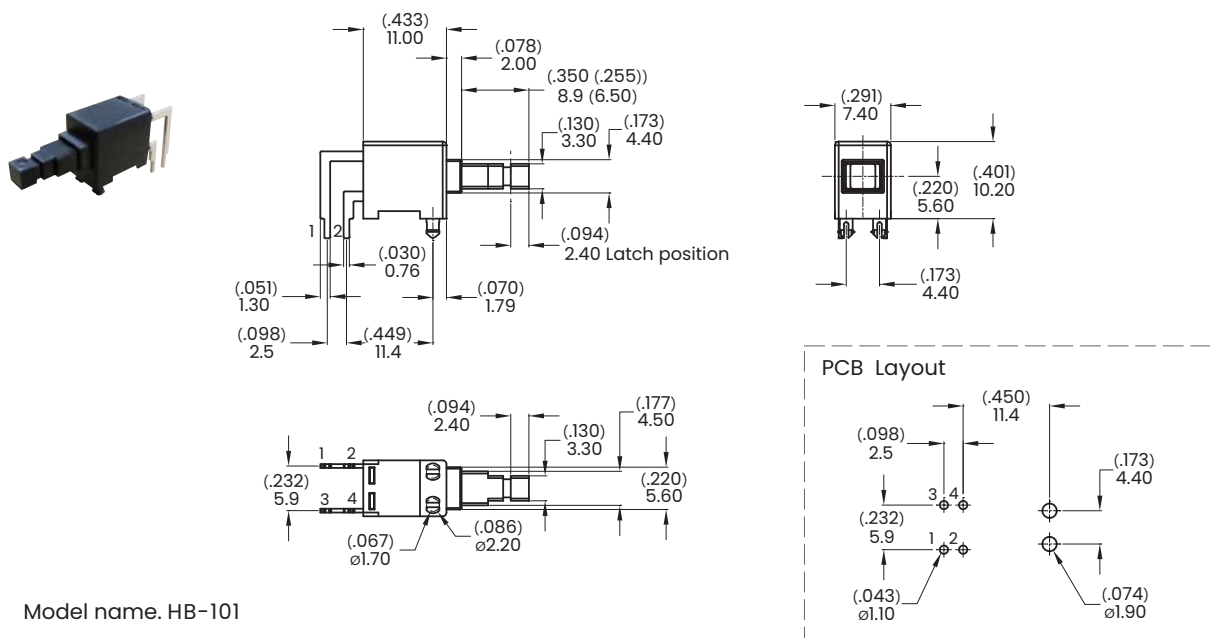

▼ CAP OPTIONS

A Rectangle

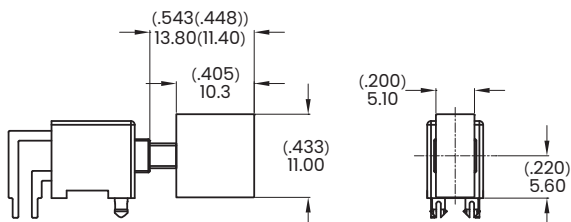

B / F Round

