

WH SERIES

Overload Protector Switch
过载保护开关



规格 SPECIFICATION

额定 Rating	3~16A 125/250VAC (UL; CUL)
动作时间标准 Action time standard:	
环境温度25℃下, 电流200%(6~32A)时, 3~60秒内断开。	
Disconnect within 3 to 60 seconds at an ambient	
temperature of 25 °C and current of 200% (6-32A)	
接触电阻 Initial Contact Resistance	50mΩ Max
绝缘电阻 Insulation Resistance	100MΩ Min 500VDC
耐电压 Withstand Voltage	1500VAC for 1 minute
机械寿命 Mechanical Life	10,000 cycles

采购识别码 HOW TO ORDER

产品系列
Series

WH-001
WH-201

基座/上盖颜色
Color of housing&actuator

B	黑色	W	白色
R	红色	A	灰色
G	绿色	O	褐色
U	蓝色	C	本色
Y	黄色	R1	鲜红色
W2	苹果白	W3	奶白色
W4	纯白	W5	纯白色

印字颜色
Printing color

W	白色
B	黑色
D	金色
N	无

带灯类型
With lamp type

L	带灯
	不带灯

特殊规格
Special specifications

R	平按钮 WH-201
A	零按钮 WH-001
C	平按钮 无过载保护器功能
E	短卡耳
F	按键加高

WH-001 - 15 B B I W 1 - L 0 1 - R

额定电流
Rated current

03	3A
04	4A
05	5A
06	6A
07	7A
08	8A
09	9A
10	10A
11	11A
12	12A
13	13A
14	14A
15	15A
16	16A
17	17A
18	18A
19	19A
20	20A

印字类型
Printing type

按键	基座
A	H
B	I
D	M
E	O
F	T
G	N

端子类型
Terminal type

1	短脚
2	中长脚
3	长脚

灯的颜色
Color of the lamp

0	琥珀色
2	红色
3	绿色
4	蓝色
5	白色
6	橙色
	不带灯

带灯电阻值
Resistance value

	无电阻
1	100KΩ
2	200KΩ
3	10KΩ
4	68KΩ
5	470KΩ
6	3.3MΩ
7	390Ω
8	240Ω
9	47KΩ

WH SERIES 过载保护开关
Overload Protector Switch

规格图纸 SPEC DRAWING

单位 Unit: mm

WH-001-10WC01N2-L62-A

WH-001-15BR01N1-L22-E

WH-001-16AANN2-F


WH-001-15AANN2-G

规格图纸 SPEC DRAWING


单位 Unit: mm




WH-001-15WW01B2-B

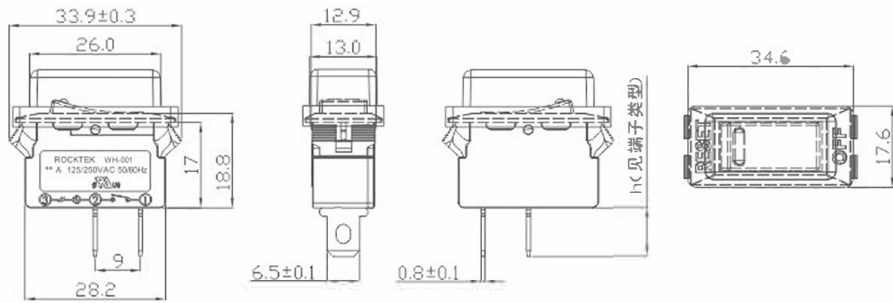


WH-001A-15BR01N3-L02-R

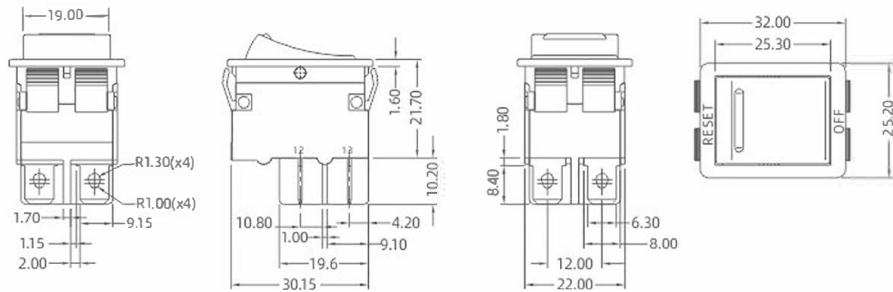

WH-201-15BR01W3-L22-R

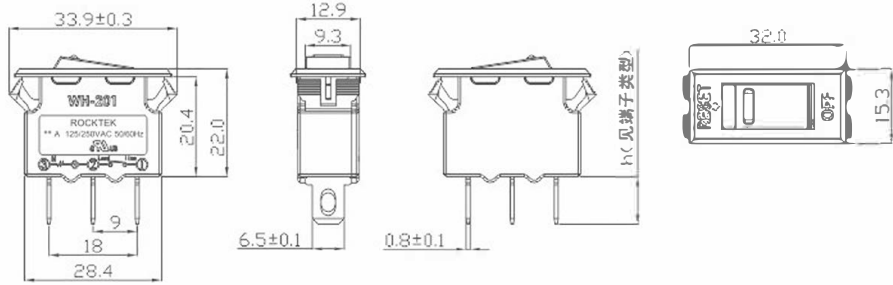


WH-201-10BRIW3-R

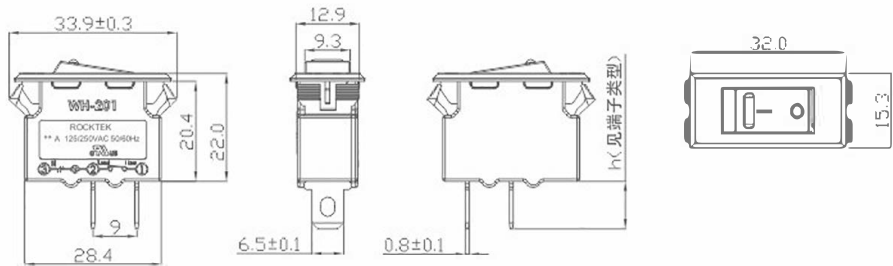

RT-L01 SERIES


Power Light
电源指示灯

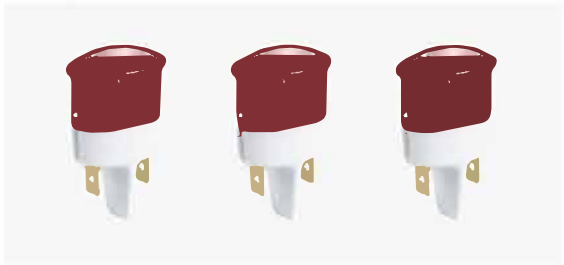

规格 SPECIFICATION

额定值: 125VAC 1/3W			
灯泡寿命: 500HRS.min, 无明显的光输出损失			
Rating: 125VAC 1/3W			
Bulb life: 500HRS.minimum.withno perceptible loss of Light output			
NO.	Name	Material	Q'ty
01	Over	PC	1pcs
02	Neon	/	1pcs
03	Terminal	C2680 1/2H	2pcs
04	Noumenon	PA66	1pcs

规格图纸 SPEC DRAWING

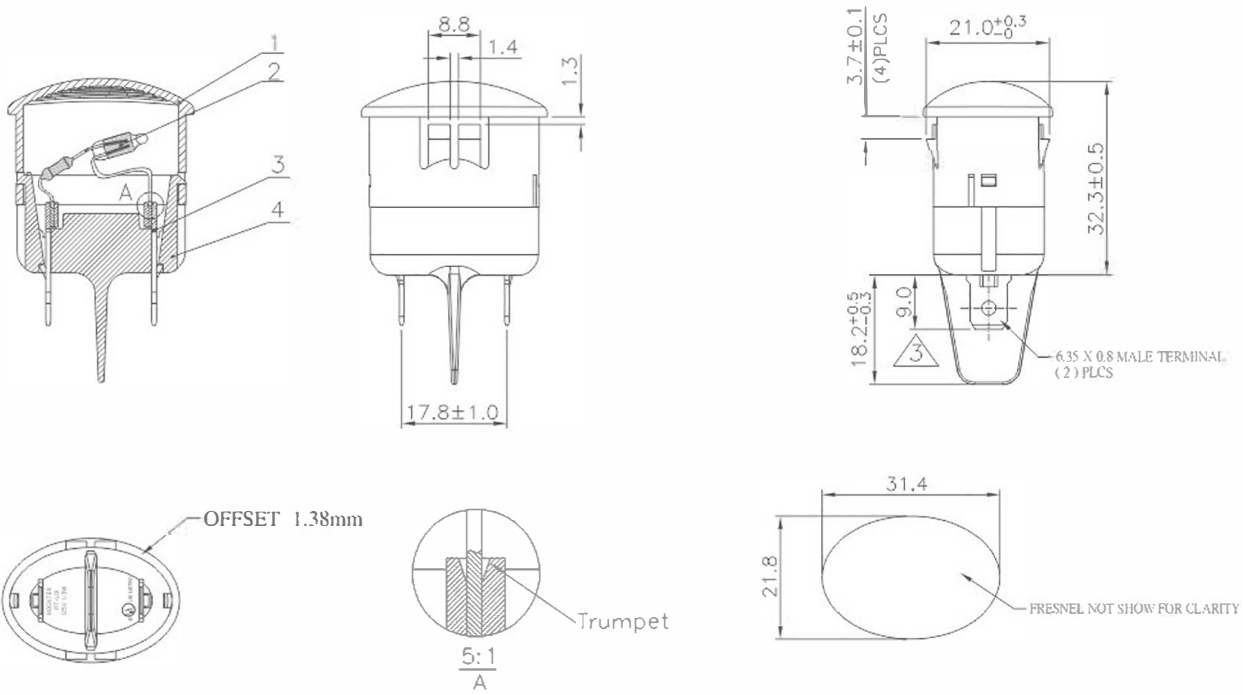

备注 NOTES

• 额定电流: 125VAC 1/3W	• ELECTRICAL RATING: 125VAC 1/3W
• 镜片材料: 聚碳酸酯 (PC 2805) 颜色: 红色	• Lens Material: Polycarbonate (PC 2805)COLOR: RED
• 基材: PA66 颜色: 白色	• Base Material: Nylon 6/6 Color: White
• 外部轮廓以匹配CAD数据。	• Outside Contour To Match Cad Data.
• 灯泡类型: 霓虹灯 (I)	• Bulb Type: Neon(i)
• 灯泡寿命: 至少500小时, 无明显的光输出损失	• Bulb Life: 500 Hrs. Min. With No Perceptible Loss Of Light Output